

ANTIFOAM PS 201

Defoamer in powder form

Technical Data Sheet May 2019

DESCRIPTION

Antifoam PS 201 is a next-generation defoamer in powder form for self-levelling mortars rich in polymers or particularly viscous.


FEATURES

Antifoam PS 201 consists of a mixture of silicone oils, eco-friendly natural oils, and surfactant polymers on a mineral support. Its action starts as soon as the dry mixture meets the water, preventing the formation of foam in general and reducing the size of the bigger bubbles even under strong mechanical agitation. The active components of **Antifoam PS 201** are very resistant to the highly basic pH of cement and they are not biodegradable, thus after their dispersion in water they keep their efficaciousness for a long time.

In self-levelling mortars, **Antifoam PS 201** is able to remove the bubbles of air from the surface very rapidly, thus giving the final product a perfectly flat surface with no superficial craters.

USE

Antifoam PS 201 has a particular composition that has been studied mostly for viscous self-levelling mixtures. However, by changing the dosages, it can be used in a large number of cement-based mortars where it is necessary to reduce the air.

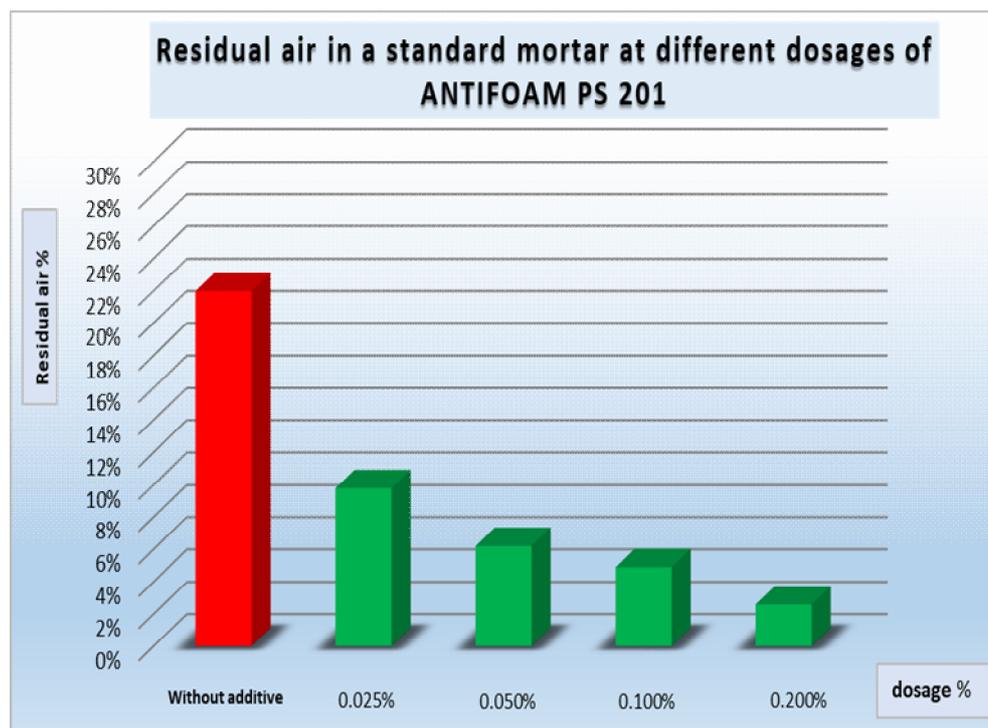

	Data	Method
TECHNICAL DATA		
State:	Powder	Visual
Colour:	White	Visual
Bulk density:	0.530 ± 0.100 kg/dm ³	IST. 10.07
Granulometry:	Min. 95% < 0.180 mm	IST. 10.09
Humidity:	Max. 10%	IST. 10.04
Water solubility:	Insoluble	IST. 10.21

DOSAGE

The recommended dosage of **Antifoam PS 201** is 0.01 - 0.3% on the weight of the solids, depending on the quantity of air to reduce. After carrying out preliminary tests, different dosages from the suggested ones can be employed, depending on the desired results.

STORAGE AND VALIDITY

If it is stored in a dry place and in the original bags kept perfectly closed, **Antifoam PS 201** has a 12 months validity from the date on the delivery note.

Should moisture be absorbed by the product, this does not prejudice its efficacy, but it makes its dosage difficult and the distribution in the finished mixture not homogeneous.

It is therefore advisable to close the bags carefully after each collection.

PRECAUTIONS

Antifoam PS 201 does not have any particular indication for its handling. It is easily removable from the skin or any surface with water and soap. Normal personal protection equipment are recommended.

Inhalation can cause an irritation of the first part of the respiratory tract. This trouble disappears immediately after stopping using it. It is therefore advisable to use a dust mask and not to disperse it in the environment.

In case of accidental loss, it must be picked up in the dry state and discharged in an authorised waste dump.

For further information, please check the Security Data Sheet.

PACKAGING

25 kg paper bags.

The specifications stated in this report have been got either through standardized tests and rules or their modifications following Pentachem systems. The methods applied can be requested to our technical service.

All the data stated in this technical sheet are based on our knowledge and experience. However, before using the item differently from indicated, it is advisable to carry out preventive tests. In any case, PENTACHEM does not assume any responsibility for any damage or defect caused by the use of our products, as the employment conditions are not under our control. We also inform that our technical service is at our customers' disposal for any information concerning the correct employment of our products.